

SENSOR

« 75»


,

1

- 1.1 75-009-IP30-SENSOR
- 1.2 75-009-IP30-SENSOR
- 1.3 220 75-009-IP30-SENSOR 50
- 1.4 (EAC),
- 1.5 II 60598-1-2011.
- 1.6 2000 3.1 15150-69,

2

- 165...265  
 - 50  
 - 150...295  
 - 9  
 - 1020  
 - 880  
 1%  
 LM-80 (IES) TM-21-11 (IESNA) - 153 000  
 - (52 ± 5)  
 - (5 ± 2)  
 - 60...140  
 (cos ) - 0,9  
 30804.4.4-2013 - I  
 - IP30  
 40 40 °  
 UL94 - v2  
 - 10  
 x x -182 110 42

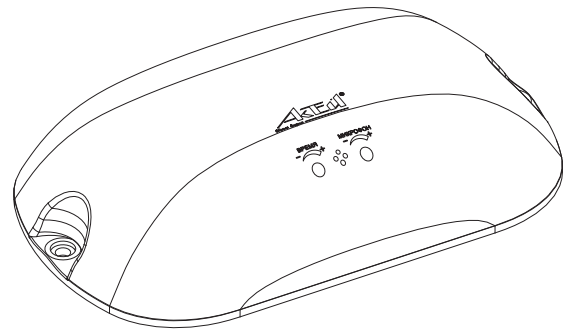

1 —

75-009-IP30-SENSOR

3

- 75-009-IP30-SENSOR — 1
- — 1
- — 1
- — 1

4

75-009-IP30-SENSOR

( )

1.

5

- 5.1
- 5.2
- 5.3

6

- 6.1
- 6.2
- 6.3
- 6.4

7

7.1

5 ( )

7.2

7.3

7.4

7.5

2

7.6

3.

7.7

(


7.8

4,

	I	II	III
( )	●	●	●
	○	●	○
	○	○	●


2—

75-009-IP30-SENSOR



3—

75-009-IP30-SENSOR

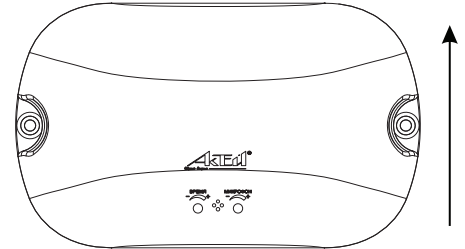

4—

75-009-IP30-SENSOR

8

I.

( )

II.

( / 20 % )

III.

I

9

10

60

72

11

70 %

40

50 °C.

—6

: « »

- ., .27



!